




# SUNVERTER 3

## AC Solar Pump Controllers

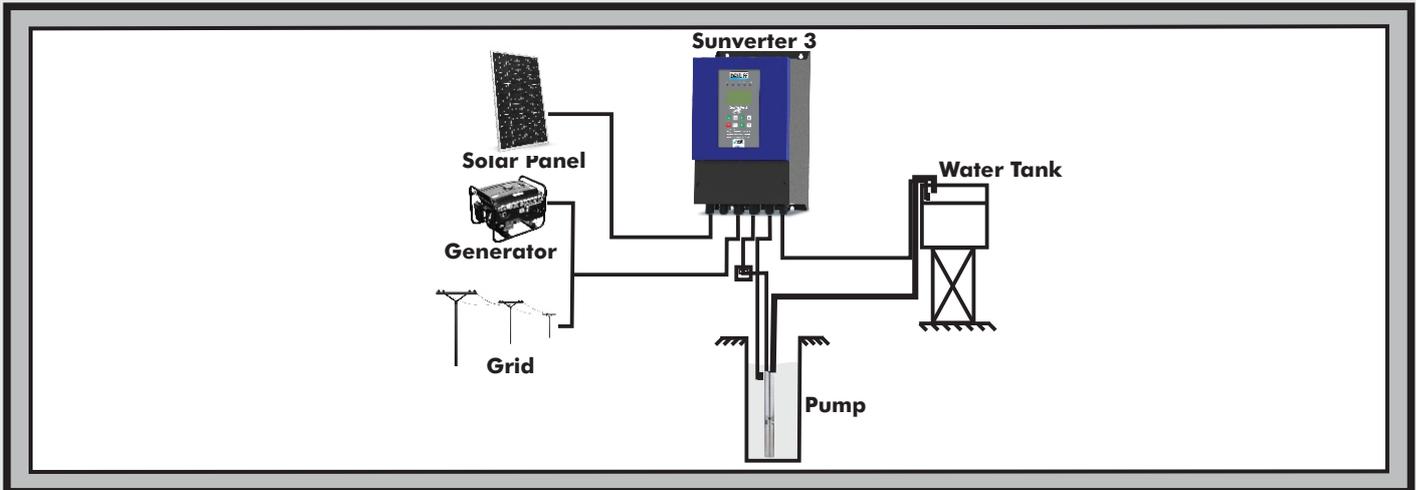

Dayliff Sunverter 3 is the latest update of the established Sunverter range of advanced AC/DC inverters specially designed for solar-powering AC motors in various water pumping applications. As well as a general upgrade of the electronics and functionality an important new feature is hybrid capability that enables concurrent operation with direct AC power from mains or generator supply while prioritising solar supply. It is adaptable to all AC motor types and can be retro fitted to existing AC supply installations in solarisation projects. Particular features include;

- Hybrid capability with the option of DC solar power, generator or mains grid power inputs
- Patented MPPT (Maximum Power Point Tracking) capability providing fast response, good stability and up to 99% efficiency.
- Fully automatic operation with up to 8 years storage capacity of operating data.
- Supports motor soft start and gives full motor protection
- User friendly LCD display interface with comprehensive display information
- Integral remote monitoring and control capability available on units 7.5kW or larger which is activated by signing up to the unique iDAYLIFF Service. For other units, a separate module is available which can be incorporated on order.
- Strong IP65 rated enclosure for enhanced component protection

### CONTROLLER FUNCTIONALITY

The controller offers the following control functions:

- Settable minimum and maximum frequency and open circuit voltage.
- Display of operating parameters including frequency, voltage, amperage, input power and pump speed.
- Display of historical data including energy generation, maximum power and operating times.
- Protection against over and under voltage, over current, system overload and module over temperature.
- Fault detection with error code display.
- Selectable hybrid modes that prioritise solar supply as well as maximise output through optimal blending of both power supplies

### INSTALLATION

Dayliff Sunverter 3 controllers are surface mounted and should be provided with a housing for water and heat protection. They must also be provided with a circuit breaker between the PV modules and controller. Due to the high operating voltages proper earthing is essential, which must be done by a qualified electrician. As a rule, all PV powered solar pumping systems should be provided with a solar module array with a nominal output about 30% greater than the motor size. In hybrid applications, higher array MPP voltage is specified to allow achievement of larger solar supply share of hybrid power supply. The arrays should be wired in a combination of series and parallel connections to ensure that the correct voltage is available into the inverter. It is important that the connection arrangement is approved by the pump supplier.

### OPERATING CONDITIONS

**Altitude:** 0-2,000m\*\*


**Relative Humidity:** 0-95% (non condensing)

**Ambient Temperature:** -20°C to 60°C\*\*

**Frequency:** 0-60Hz

### CONTROLLER DATA

Model	Motor Rated Power (kW)	Rated Voltage	Output Current (A)	Max DC Input Voltage VDC	MPP Voltage VDC, Solar	MPP Voltage VDC, Hybrid	Dimensions (mm)			Weight (kg)
							H	W	D	
SV3/1.5M	1.1	1x240V	8.6	450	150-360	150-370	416	257	158	8.5
SV3/2.2M	1.5		11							
SV3/3.7M	2.2		17							
SV3/3.7T	3.7	3x415V	9	850	500-700	600-700	458	300	175	11.5
SV3/5.5T	5.5		13							
SV3/7.5T	7.5		18							
SV3/11T	11		24							
SV3/15T	15		30							
SV3/18T	18.5		39							
SV3/22T	22		45							
SV3/30T	30		60							
SV3/37T	37		84							
SV3/45T	45		98							
				780	500-600	540-600	625	388	235	29

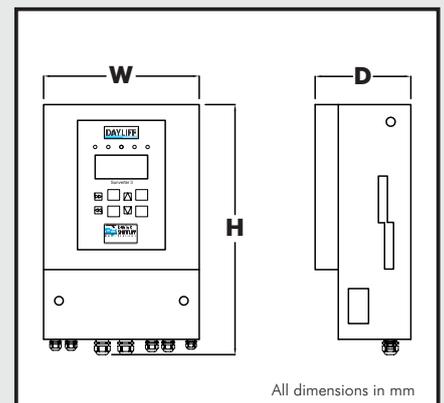

All dimensions in mm

\*\*if the altitude is over 2,000m, the rated output current should be derated by 10% for every 1,500m increase in height